

DESCRIPTION

Jotex Fairwall is a wet mix prepolymerised putty. It is a ready to use product fabricated for preparing the internal walls for water based coatings. It is a non hazardous waterborne coating. It has an excellent ability to bridge the cracks, and is also suitable for filling the cracks on the wall.

PROPERTIES

Test Name	Properties
Volume solid ratio	70 - 75%
VOC contents	Low VOC
DFT	2 - 3mm
pH	8 - 10units
Thinning	Not required
Disposal	Dried material can be disposed in Municipal

RECOMMENDED APPLICATION AREAS

Concrete surface, cement plaster wall, gypsum board sheets and putty surfaces, etc.

METHOD OF APPLICATION

PREPARATION

- The temperature of the substrate should be min. 10°C and min. 3°C above the dew point of the air, temperature and relative humidity measured in the vicinity of the substrate. .

SURFACE PREPARATION

- The substrate must be sound, clean, dry, free from dust, oil, grease and laitance etc. All traces of release agents must be removed. On chalky and dusty surfaces, all loose material must be removed by stiff bristle brushing.

HANDLING

Handle with care. Stir well before use.

APPLICATION

- Putty Patra

Typical Putty application system

- Apply 2 coats of Fairwall Putty

FEATURES AND BENEFITS

ADVANTAGES

- 100% acrylic putty
- Excellent hiding
- Water repellent
- High spreadibility
- Low VOC
- Easy Application
- Cost Effective

COVERAGE - 30 Kg Bucket

450 - 500 sq.ft/bkt for 2 coat

SETTING AND CURING

The products set initially by Dry-curing in approximately 3 to 4 hours and the next activity can be taken up after 72 hours of application

Fairwall[™]

Jotex Fairwall - Prepolymerised Putty


PACKAGING & STORAGE CONDITIONS

Std. Packing is 1 Kg, 5 Kg, 30 Kg. Buckets
Storage conditions are to keep the containers in a dry, cool, well ventilated space and away from source of heat and ignition. Containers must be kept tightly closed.

POT LIFE & SHELF LIFE

- In open pot 6 to 8 hours in shade (not under direct sunlight)
- 365 days from the date of manufacturing in standard storage warehouse.

TOOLS

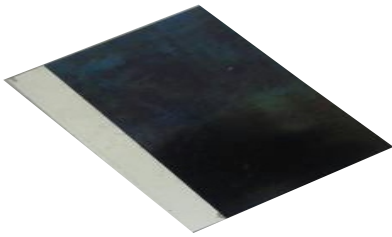

HEALTH & SAFETY

Use under well ventilated conditions. Do not breathe or inhale mist. Avoid skin contact. Eyes should be well flushed with water and medical attention sought immediately For detailed information on the health and safety hazards and precautions for use of this product, we refer to the Material Safety Data Sheet.



Colour: White Only



WallingCo **Products**

WallingCO Products India LLP

Office 001, Lotus Plaza B, Opp. Karishma Society, Kothrud,
Pune - 411038, Maharashtra, India.
Tel.: + 91 95525 80896 / 97.
Email: order@wallingco.com