

## FREELANCER™

JOTEX Texture Coatings

### DESCRIPTION

JOTEX FREELANCER is a High quality acrylic coating with trowel application. It is a superior quality surface coating, with high grade polymer, for giving a continuous protective coating of 1.5 mm to 2 mm thickness on the surfaces. The product is formulated to sustain weathering, and heavy rains. The coatings also are resistant to the growth of the algae and fungus. The coatings are breathable, washable and are long lived. In addition to the above these are strong to crack resistance.

### PROPERTIES

Test Name	Properties
Volume solid ratio	75 - 80%
VOC contents	Low VOC
Density(Fresh)	1.70 +/- 0.05 kg/l
DFT	1.5 - 2 mm
Finish	Scratch Finish
pH	8 - 10 units
Thinning	Not Required
Disposal	Dried material can be disposed in Municipal

### RECOMMENDED APPLICATION AREAS

Concrete surface, cement plaster wall, and dry wall panel surfaces, etc.

### FEATURES AND BENEFITS

#### ADVANTAGES

- Acrylic Based
- Anti-algae and anti fungus
- Water repellent
- Low VOC
- Easy Application
- Cost Effective

### METHOD OF APPLICATION

#### PREPARATION

- The temperature of the substrate should be min. 10°C and min. 3°C above the dew point of the air, temperature and relative humidity measured in the vicinity of the substrate.

#### SURFACE PREPARATION

- The substrate must be sound, clean, dry, free from dust, oil, grease and laitance etc. All traces of release agents must be removed. On chalky and dusty surfaces, all loose material must be removed by stiff bristle brushing.

#### HANDLING

Handle with care. Stir well before use.

#### APPLICATION

- Trowel- Recommended

### COVERAGE - 30 Kg Bucket

75 - 85 sq.ft/bkt. for Single Coat

### SETTING AND CURING

The products set initially by Dry-curing in approximately 3 to 4 hours and the next activity can be taken up after 24 hours of application

## FREELANCER<sup>™</sup> | JOTEX Texture Coatings


### PACKAGING & STORAGE CONDITIONS

Std. Packing is 5 Kg., 30 Kg Buckets  
Storage conditions are to keep the containers in a dry, cool, well ventilated space and away from source of heat and ignition. Containers must be kept tightly closed.

### POT LIFE & SHELF LIFE

- In open pot 6 to 8 hours in shade (not under direct sunlight)
- 365 days from the date of manufacturing in standard storage warehouse.

### TOOLS

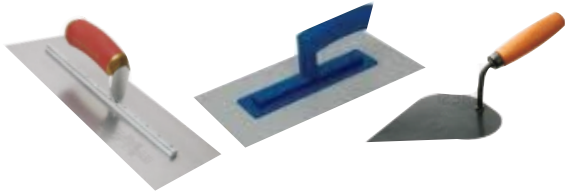

### HEALTH & SAFETY

Use under well ventilated conditions. Do not breathe or inhale mist. Avoid skin contact. Eyes should be well flushed with water and medical attention sought immediately For detailed information on the health and safety hazards and precautions for use of this product, we refer to the Material Safety Data Sheet.



WallingCo Products

### WallingCO Products India LLP

Office 001, Lotus Plaza B, Opp. Karishma Society, Kothrud,  
Pune - 411038, Maharashtra, India.  
Tel.: + 91 95525 80896 / 97.  
Email: [order@wallingco.com](mailto:order@wallingco.com)